

PRODUCT NAME

3200i

2.2kw to 11.0kw

Fully Isolated

3200i KEY FEATURES

For DC motors up to 48 Amps

Fully isolated control electronics

On-board relay indicates zero speed and/or motor overload

Features Sprint Electric micro analog processor

Numerous inputs and outputs for complex system applications

Extra 50% peak torque for rapid acceleration or shock loads

User adjustable:

- Acceleration
- Deceleration
- Max motor speed
- Min motor speed
- IR comp
- Stability
- Max motor current

Switch selectable power up inhibit


DESCRIPTION

Designed to give the customer the choice.

The 3200i includes an extensive specification with quality, value for money and reliability assured.

The new 3200i with cover is available up to 48 Amps.

Available up to 11kw output capability this compact design is easily integrated and provides unparalleled performance.

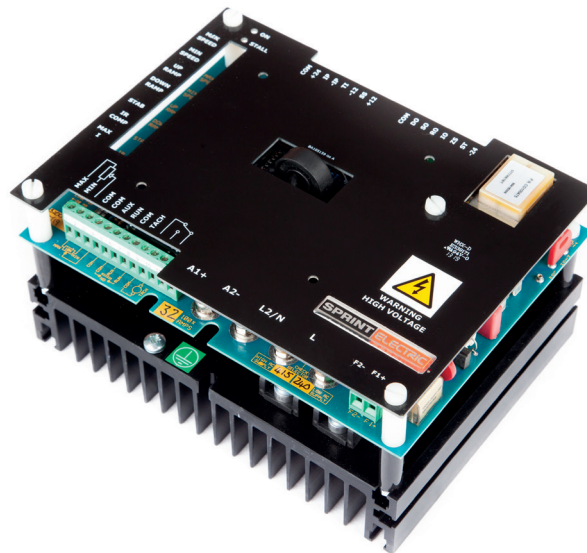

MODEL COMPARISON

MODEL	AC SUPPLY RANGE	TYPICAL ARMATURE VOLTAGE	MAX CONTINUOUS ARMATURE CURRENT	NOMINAL POWER
3200i/8	200 to 264v	180v	8A	1.1kW (1.5HP)
	360 to 440v	320v	8A	2.2kW (3HP)
3200i/16	200 to 264v	180v	16A	2.2kW (3HP)
	360 to 440v	320v	16A	4.0kW (5.3HP)
3200i/32	200 to 264v	180v	32A	4.5kW (6.0HP)
	360 to 440v	320v	32A	7.5kW (10.0HP)
3200i/48	200 to 264v	180v	48A	7.0kW (10.0HP)
	360 to 440v	320v	48A	11.0kW (14.6HP)

DIMENSIONS

H	150 mm
W	200 mm
D	110 mm

Low voltage supply options and fuses available.

PRODUCT NAME

3200i

2.2kw to 11.0kw
Fully Isolated

SPECIFICATION

Control action:	Dual loop Proportional + Integral
Speed regulation:	0.1% Tachogenerator 2% Armature voltage feedback
Armature:	48 Amps at 0.9 x AC supply voltage
Overload protection:	Extra 50% peak torque for 30 secs prior to stall trip operation
Field output:	2 Amp at 0.9 x AC supply voltage
Customer presets:	Max speed: 25v - 400v full scale feedback Min speed 0 to 30% of max speed Up ramp (Acceleration) 1-30 secs Down ramp (Deceleration) 1-30 secs Stability IR comp Max armature current 0-100%
Switches:	Maximum current - 4 ranges Feedback voltage - 4 ranges Relay function - zero speed and/or stall Power-up Inhibit Tach/AVF selection
Inputs:	Speed Torque 4-20mA and 0-20mA Auxiliary speed inputs +ve and -ve Drive Run Tachogenerator Pushbutton stop/start
Outputs:	Speed Current Setpoint Ramp Total Demand Zero speed and stall relay driver +/-12v, +/- 24v rails
Relay:	Volt free change over contacts for zero speed and/or stall
Other features:	Overspeed limit Over torque limit Inverse time overload 50% stall threshold Phase angle clamp Precision Reference Precision tach rectifier

Download product manual for full specification.

3200i KEY FEATURES

Switch selectable feedback calibration - no component changes

Switched maximum current ranges for easy matching to motor current rating

Switch selectable drive relay functions

Ultra stable potentiometer reference for optimum long term speed and torque stability

Adjustable Stability control for optimum motor response

Switch selectable Tach or armature voltage feedback

Torque control input for basic winding or tension control, with overspeed limiting

International dual voltage supply compatibility

4-20mA and 0-20mA loop input option as standard

Output signals for easy display of motor speed and load

Compact size, saves panel space and makes for easy retrofitting

Zero reference interlock facility

Single Quadrant operation

Adjustable IR compensation for improved AVF speed regulation

Precision tach rectifier

Find out more:
www.sprint-electric.com

Sprint Electric Ltd.

Peregrine House, Ford Lane
Ford, Arundel, West Sussex
BN18 0DF United Kingdom

Tel: +44 (0)1243 558080

Fax: +44 (0)1243 558099

Email: info@sprint-electric.com